


A-ANTENNAS

| | |
|---------------|---------------------------------------------------------|
| Frequency | 2400-2485MHz |
| Gain* | 4dBd (≈6dBi) |
| VSWR* | ≤1.5:1 |
| Impedance | 50Ω |
| Polarization | Vertical |
| Antenna type | Omnidirectional antenna |
| Maximum power | 20W |
| Connector** | N female |
| Mounting | Mounting bracket fits 35-50mm mast tubes |
| Dimensions | ø23/32x330mm |
| Weight | 445g |
| Color | White |
| Material | Mount: Aluminum, stainless steel Radome: fibre glass |
| Other | DC grounded |

* The total efficiency and VSWR is depending on materials in the near field of the antenna and size/shape of GND. The values in the specification are typical values

** Other cable lengths and connector available on demand

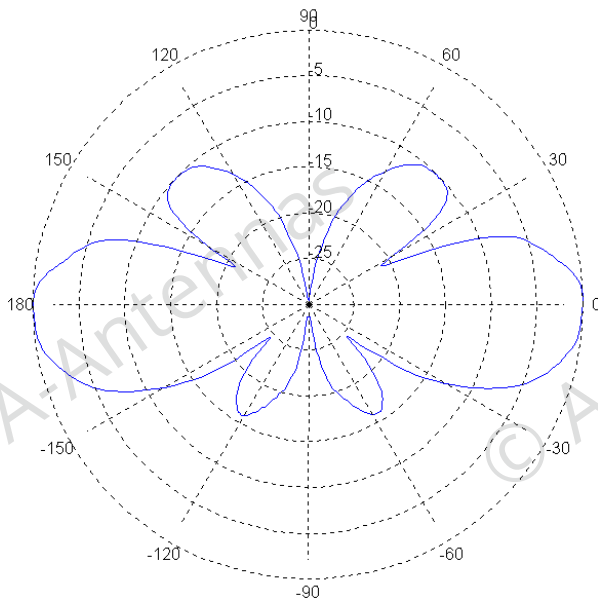

Typical radiation pattern normalised to 0 dB for E-field